



Your Brand for all Meeting Spaces

Turning Complexity
into Simplicity

A brand of  DELTA

About Vivitek / Delta



Vivitek – a brand of Delta - is offering award-winning digital projectors, large format display devices, wireless collaboration and digital signage solutions.

Delta, founded in 1971 is a global leader in switching power supplies and thermal management products with a thriving portfolio of smart energy-saving systems and solutions in the fields of industrial automation, building automation, telecom power, data center infrastructure, EV charging, renewable energy, energy storage and display solutions, to nurture sustainable cities and smart manufacturing.

Vivitek is committed to enabling the visualization and sharing of information from multiple devices in the easiest and most secure way possible.

Simple. Guaranteed.

Vivitek Projectors

Vivitek has a wide range of projectors, powered by DLP (Digital Light Processing) technology, offering sharp, high-contrast images with vibrant colors and reliable performance for top-quality presentations, making them a preferred choice for professionals seeking clarity and impact in any environment.

During the past years Vivitek has become a trusted brand for large format projections, from small meeting rooms to expansive auditoriums and museums, including immersive mapping applications.

Novo Ecosystem

Vivitek is the first brand introducing an ecosystem of display technologies, wireless collaboration and digital signage solutions for ease-of-use, central device management and secure communication.

Novo Ecosystem describes all available hardware devices and software tools Vivitek offers to support wireless collaboration & digital signage for Business and Education environments.

- NovoConnect (add-on)
- Novo-inside (integrated)
- NovoDS (Digital Signage)
- Extensions (Launcher)
- Software, Apps, Cloud Services

Lorem ipsum dolor sit amet, consectetur adipiscing
 elit. Phasellus id lorem massa. Vividulum ante laore,
 euismod vel ipsum nec, aliquam tempus purus. Proin et
 blandit mi. Duis id mauris seductoribus, nulla nulla quis
 lacus mauris. Maecenas et quam tristique, imperdiet
 lacus nec, consectetur tristique. Phasellus et ornare
 mauris, eu accumsan lacus. Quisque scelerisque mauris
 in blandit placerat. Phasellus viverra, mi id gravida
 hendrerit, risus ante commodo nec, et efficitur velit
 lacus sit amet felis. Maecenas mollis neque seductoribus
 elementum viverra.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.
 Phasellus id lorem massa. Vividulum ante laore,
 euismod vel ipsum nec, aliquam tempus purus. Proin et
 blandit mi.

Projectors for Multi-Purpose

The multi-purpose projectors redefine the visual experience. They offer convenience and versatility in a compact size, whether you are a business professional needing to deliver dynamic presentations or an educator seeking flexible teaching tools.



5-Year Education
Warranty

Lamp Projector D300 Series / D800 Series

Compatible
with:



Series	Model Name	Brightness (ANSI)	Resolution	Lifetime (Light source)	Throw Ratio	Image Size	Weight
D800	DU857	5000 Lumen	WUXGA	3000 / 4000	1.39~ 2.09:1	26.7" – 334"	3.4kg
D300	DH380	4000 Lumen	1080p	5000 / 6000 / 10,000 Hrs.	1.48~1.62:1	40" – 300"	2.6kg
	DW350	4000 Lumen	WXGA		1.55 – 1.73:1		2.6kg
	DX330	4000 Lumen	XGA		1.94 – 2.33:1		2.6kg
	DW355-ST	3800 Lumen	WXGA		0.521:1		2.6kg
	DX335-ST	3800 Lumen	XGA		0.617:1		2.6kg

Laser Projector – D2000Z Series / D3600Z Series

Compatible
with:



Series	Model Name	Brightness (ANSI)	Resolution	Lifetime (Light source)	Throw Ratio	Image Size	Weight
D3600Z	DU3661Z	5000 Lumen	WUXGA	20,000 / 30,000 Hrs.	1.39 - 2.09:1	25.9" – 324.9"	7kg
D2000Z	DH2661Z	4000 Lumen	1080p		1.475 – 1.753:1	40" – 300"	4.8kg
	DW2650Z	4200 Lumen	WXGA		1.544 – 1.86:1		


Ultra Short Throw Projector – D700 Series

Compatible
with:



Series	Model Name	Brightness	Resolution	Lifetime	Throw Ratio	Weight
D700 Series	DU775Z-UST	5000 Lumen	WUXGA	20,000 / 30,000 Hrs.	0.25:1	8.90kg
	DW770-USTi	3500 Lumen	WXGA		0.35:1	5kg
	DW770-UST	3500 Lumen	WXGA			



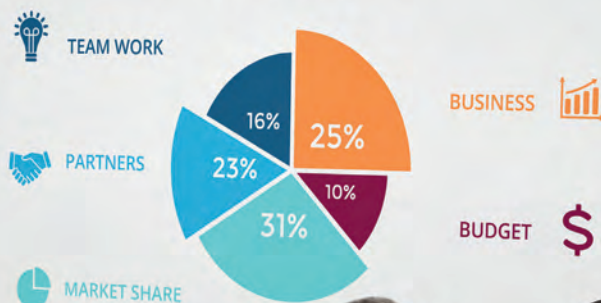

Projectors for Conferences

Committed to innovation and unwavering reliability, Vivitek provides a range of projectors tailored to meet the demands of modern corporate environments. Delivering exceptional clarity, vivid visuals, and seamless connectivity, the conference projectors ensure your message shines through with impactful precision.



5-Year Warranty

D4000Z Series / D5000Z Series – Fixed Lens

Compatible
with:



Series	Model Name	Brightness (ANSI)	Resolution	Lifetime - Eco (Light source)	Throw Ratio	Projection Size	Weight
D5000Z	DK5155Z	6200 Lumen	4K-UHD	30,000 Hrs.	1.15 - 1.9: 1	36" – 313"	12kg
	DU5053Z	7500 Lumen	WUXGA	30,000 Hrs.	1.15 - 1.9: 1	36.7" – 322"	12kg
	DU5051Z	6300 Lumen	WUXGA	30,000 Hrs.	1.15 - 1.9: 1	36.7" – 322"	12kg
	DU5053-ST	6500 Lumen	WUXGA	30,000 Hrs.	0.5 / 0.8: 1	80" – 300"	12kg
D4000Z	DU4381Z-ST	6100 Lumen	WUXGA	30,000 Hrs.	0.5: 1	60" – 325"	11kg

Laser Projector – D7000Z Series

Compatible
with:



Series	Model Name	Brightness (ANSI)	Resolution	Lifetime (Light source)	Throw Ratio	Projection Size	Weight
D7000Z	DU7299Z	10000 Lumen	WUXGA	30,000 Hrs.	0.47 – 8.26 :1 (Multi-Lens Options x9)	32.1" – 500"	23.5kg
	DU7199Z	9000 Lumen	WUXGA	30,000 Hrs.			20.6kg
	DU7099Z	8000 Lumen	WUXGA	30,000 Hrs.			20.6kg

D7000Z Series Motorized Lenses

Lenses	Lens Type	Model	Image Size	WUXGA - Throw Ratio Range
	Short- Throw	D86-04705	80" ~ 300"	0.47 – 0.50
	Short Throw Zoom	D86-0711	42.3" ~ 500"	0.77 - 1.1
	Standard Short Throw	D86-1113	35.8" ~ 500"	1.10 - 1.30
	Semi Short Throw	D86-1216	39.1" ~ 500"	1.25 - 1.60
	Standard	D86-1519	48.2" ~ 500"	1.54 ~ 1.93
	Long Throw	D86-1929	32.1" ~ 500"	1.93 - 2.9
	Semi Long Zoom	D89-SMLZ01	40" ~ 500"	2.5 – 4.7
	Long Zoom 1	D88-LOZ101		3.58 - 5.38
	Long Zoom 2	D88-LOZ201		5.31 - 8.26

BUSINESS PLAN



Projectors for Large Venue & Mapping

The Large Venue projectors are meticulously engineered to transform any space into an immersive visual experience. Whether you are hosting a large-scale corporate event, staging a theatrical performance, or creating unforgettable presentations in auditoriums, Vivitek's projectors rise to the occasion. With a wide range of options available, you can select projectors that are tailored for your environment.



5-Year Warranty

- The projectors feature a long-lasting laser light source, providing consistent and maintenance-free operation over an extended lifespan.
- Flexible installation due to interchangeable lenses: including lens shift.
- Edge blending, warping, and stacking capabilities enable seamless, large-scale displays for immersive experiences.
- Advanced color technology delivers precise, accurate and high contrast images with full spectrum, making it suitable for applications where ultimate picture performance is crucial.
- Projector Control software enables control over viewing options, general settings and scheduling over the network.
- Vivitek offers a 5-year warranty

D8000Z Series – Laser, Motorized Lens

Compatible
with:



Series	Model Name	Brightness (ANSI)	Resolution	Lifetime (Light source)	Throw Ratio	Projection Size	Weight
D8000Z	DK8155Z	15000 Lumen	4K+	>30,000 Hrs.	0.31 – 6.94:1	40" – 500"	20.6kg
	DK10000Z	10000 Lumen	WUXGA	>30,000 Hrs	0.38 – 8.26 :1	32.1" – 500"	23.5kg
	DU8055Z	16000 Lumen	WUXGA	>30,000 Hrs	0.31 – 6.94:1		20.6kg
	DU8053Z	14000 Lumen	WUXGA	>30,000 Hrs			20.6kg

D8000Z / DK10000 Series Motorized Lenses

Lenses	Lens Type	Model	Zoom Ratio	WUXGA - Throw Ratio Range
	Short Throw	D89-UST01	80" - 300"	0.31 - 0.33:1
	ST - Zoom	D89-UWZ01	80" - 300"	0.55 - 0.75:1
	Standard - ST	D89-UWZ02	60" - 400"	0.74 - 1.08:1
	Semi - ST	D89-WZ01	60" - 500"	1.05 - 1.41:1
	Standard	D89-STD01	60" - 500"	1.4 - 2.11:1
	Semi Long Throw	D89-SMLZ01	50" - 500"	2.1 - 4.0:1
	Long Zoom 1	D88-SMLZ01	47.6" - 595"	3.0 - 4.52:1
	Long Zoom 2	D88-LOZ101		4.46 - 6.94:1



The D9000Z Series, a groundbreaking line of single-chip DLP laser projectors engineered to redefine brilliance and innovation in large venue projection. Set to revolutionize projection in demanding environments, the D9000Z Series has been designed for seamless integration and control, offering unmatched operational features while setting a new benchmark for performance and versatility.










5-Year Warranty

D9000Z Series – Single Chip, Laser, Motorized Lens

Series	Model Name	Brightness (ANSI)	Resolution	Lifetime- Eco (Light source)	Throw Ratio	Projection Size	Weight
D9000Z	DU9057Z	27000 Lumen	WUXGA	>30,000 Hrs.	0.38 – 10.3 :1 (Multi-Lens Options x7)	40" – 500"	45.4kg
	DU9055Z	24000 Lumen	WUXGA	>30,000 Hrs.			45.4kg
	DU9053Z	21000 Lumen	WUXGA	>30,000 Hrs.			45.4kg

D9000Z Series Motorized Lenses

Lenses	Lens Type	Model	Image Size	WUXGA - Throw Ratio Range
	Ultra Short Throw	D98-UST01	80" - 300"	■ 0.38
	Ultra-Wide Zoom	D99-0912	80" - 300"	■ 0.9 - 1.2 : 1
	Short Throw Zoom	D99-1215	60" - 400"	■ 1.2 - 1.56 : 1
	Standard	D99-1520	60" - 500"	■ 1.5 - 2.0 : 1
	Long Throw	D99-2040	60" - 500"	■ 2.0 - 4.0 : 1
	Ultra-Long Throw	D99-4070	50" - 500"	■ 4.0 - 7.0 : 1
	Ultra-Long Throw 2	D98-69103	47.6" - 595"	■ 6.9 - 10.3:1

Enable Seamless Collaboration and Stunning Digital Signage with Vivitek's Novo Ecosystem!

Vivitek offers unmatched comprehensive solutions whether you're striving for seamless wireless team collaboration or to convey information effectively with digital signage. Vivitek's Novo Ecosystem will cover your needs.

The Novo Ecosystem places user-friendly reliability first, offers scalable solutions for diverse needs, maintains uncompromised security, and seamlessly integrates with existing networks and systems.

NovoConnect

Wireless Collaboration

Add-On Devices



Novo NC-X500



Novo NC-X710

Software

NovoConnect Stage
Windows Collaboration Software

NovoConnect Software

Remote Manager Cloud

Collaboration & Signage Combined

All-in-One Display Devices



NovoTouch BK & EK



NovoDisplay



NovoWall

Add-On Devices



Novo NC-X710

NovoDS

Digital Signage

Add-On Devices



NovoDS DS110



NovoDS DS310

Software

NovoDS Cloud
Cloud based playlist creation

NovoDS Studio
Local playlist creation

Novo Ecosystem Key Principles

Vivitek's Novo Ecosystem sets the bar with wireless collaboration and digital signage based on four guaranteed principles.



Simplicity

Simplicity is our first principle, as the user experience our main priority.



Security

Advanced security features, AES-256 encryption and compliant with ISO 27001 international standard.



Integration

Effortless integration into existing infrastructure.



Centralisation

All NovoConnect and NovoDS products can be centrally controlled with the remote manager software.







Add on devices

NovoConnect

The NovoConnect Wireless Collaboration devices are ideally suited to those who already have a screen or a projector, but wish to enhance or extend their existing AV infrastructure with wireless presentation functionality, or maximise their screen use with digital signage.

		
Model	NC-X500	NC-X710
Applications	Corporate / Education	
Wireless Collaboration	Built-in	
BYOM Compatibility (Windows, macOS)	Windows 10+ / MacOS 10.11+ / Android 5.0+ / iOS 9+ / Chromebook	
Simultaneous Connections	64	
Simultaneous On-screen connections	1, 2, 3, 4	
Native Screen Mirroring	Miracast - Win 10, AirPlay, GoogleCast	
Split-View	Quad Split-View	
AirPlay Discovery Enhanced	Yes	
Meeting ID	Yes	
Screen Duplication Over The Network	1-way NT Live Receiver	2-way NT Live Sender & Receiver
Data Encryption AES-256	Yes	
ISO 27001	Yes	
Device Management	PC Based / Cloud Based	
Over-the-air Software Upgrade	Yes	
Display Resolution	4K-UHD	
Optional Launcher	LauncherOne / LauncherPlus	
Digital Signage	NA	Built-in
Storage	Internal: 16GB (eMMC Flash) External: Micro SD card slot (up to 32GB) and USB drive	
WiFi	802.11 b/g/n/ac (2.4GHz & 5GHz) 2T2R	
Ethernet	RJ-45	
Power Over Ethernet (PoE)	NA	Yes
HDMI Out	×1 (V2.0), Resolutions: 1920×1080p @ 60fps, 4K-UHD@ 60fps	
Audio Out	x1	
USB Port	USB 2.0 ×1, USB 3.0 ×1, USB-C ×1	
Kensington Lock	x1	
Operating Temperature	0° ~ 40° C; 32° ~ 104° F (Ambient)	
Power	DC jack: 5V/2A, 10W	DC jack: 5V/2A, 10W RJ45: Power over Ethernet (IEEE802.3 af)
Dimensions (LxWxH)	96mm x 105mm x 28mm	178mm x 96mm x 28mm
Weight	316g	490g
Warranty	3 Years	



All-in-One Flat Panel

Vivitek offers the most complete all-in-one display solutions with wireless collaboration and digital signage. Catering to the needs of both corporate and education users, the collaborative panels offer wireless presenting, video conferencing, and a seamless switch to signage mode.

The panels feature high-resolution displays, multi-touch interactivity, and intuitive user interfaces that enhance engagement and productivity.

With robust security features and easy integration into existing systems,

Vivitek's solutions provide an efficient and effective way to collaborate and communicate in any setting.

	NovoTouch		NovoTouch	NovoWall
				
Series	BK Series	EK Series	Windows™ Based	LED All-in-One
Applications	Education / Corporate Signage	Education / Corporate Signage	Education / Corporate	Education / Corporate
EDLA Certified	Yes	Yes	NA	NA
Screen Size	65" / 75" / 86"	65" / 75" / 86"	65" / 92"	135"
Display Type/ Technology	Backlit D-LED (ADS Panel)	Backlit D-LED (ADS Panel)	Backlit D-LED (ADS Panel)	LED
Display Resolution	4K-UHD	4K-UHD	4K-UHD / 5K-UHD	1080p
Brightness (Typ.)	450 (cd/m2)	450 (cd/m2)	450 (cd/m2)	450 (cd/m2)
Aspect Ratio	16:9	16:9	16:9 / 21:9	4K-UHD
Touch Technology	Infrared Touch	Infrared Touch	Infrared Touch	Non-Touch
Touch Points	Writing- 10 points Touch – 40 points	Writing- 10 points Touch – 50 points	Writing- 10 points Touch 40 / 50 Points	NA
Anti-Palm	NA	Yes	NA	NA
Wireless Collaboration (NovoConnect)	Built-in	Built-in	OPS Bundled (NovoConnect Stage)	OPS Bundled (NovoConnect Stage)
Digital Signage	Built-in (NovoDS)	Built-in (NovoDS)	NA	NA
BYOD - Supported OS	Windows 10+ / MacOS 10.11+ / Android5.0+ / iOS 9+ / Chromebook		Windows, MacOS, iOS	
Native Screen mirroring	AirPlay, Chromecast, Miracast		AirPlay, Miracast	
Video Conferencing	NA	Optional	Built-in Camera	Optional
Screen Duplication Over the Network	2-way NT Live Receiver / Sender	2-way NT Live Receiver / Sender	NA	NA
Device Management	PC Based / Cloud Based	PC Based / Cloud Based	NA	NA
Over-the-Air Software Upgrade	Yes	Yes	Yes	Yes
Optional Launcher	LauncherPlus, LauncherOne	LauncherPlus, LauncherOne	LauncherPlus	LauncherPlus
Warranty	5 Years	5 Years	5 Years	3 Years



NovoConnect Stage

NovoConnect Stage is the wireless collaboration software for Windows users that turns any Windows device into a collaboration platform that enables multiple screens to present to the main display. It is ideal for information sharing and creates a collaborative meeting environment by combining video conferencing and content from Windows computers, tablets or smartphones. NovoConnect Stage is an agnostic platform that provides support for all operating systems and facilitates BYOD!



BUSINESS

Create a collaborative meeting environment with any Windows-based flat panel displays.



EDUCATION

NovoConnect Stage on a collaborative panel gives students the opportunity to participate in a discussion by sharing their device.



WORKSHOP

With NovoConnect Stage on the trainer's laptop, it is easy to collaborate on-the-go, where the laptop serves as the core of the collaborative environment.

Features and Benefits



Up to 40 participants can be connected simultaneously.



Floating screen with quick layouts.



Instant 4K screen mirroring.



Connections through NovoConnect App, Software, web portal or Airplay®.



Supports USB Launcher



AES-256 encryption, and compliant with ISO 27001 international standard.

NovoConnect Stage	
Applications	Corporate / Education
BYOD Compatibility	Windows, macOS, Ubuntu, Android/ GoogleCast, iOS/ AirPlay
Simultaneous Connections	64
Simultaneous On-screen	1, 2, 3, 4
Screen Mirroring	iOS, NovoConnect Software / App, Web Portal
Split-View	Floating Screens and Quick Layouts
PC System Requirements	OS System: Windows 10+
	CPU: 8G
	RAM: 4G
Aspect Ratio	16:9 / 21:9
Display resolution	3840×2160 / 5120×2160
Product Offering	OPS + NovoConnect Stage (2years License) + 65" or 92" iFPD
Over-the-air Software Upgrade	Yes
Optional Launcher	Yes

Bring Your Own Meeting (BYOM)

Vivitek offers a BYOM driver as an upgrade to enable Novo devices to manage USB connected In-Room peripherals i.e. In-Room cameras, microphones and speakers to expand the capabilities of the NovoConnect Solution.



BUSINESS

Enhance your video conferencing experience from your personal device by leveraging AV peripherals in meeting rooms.



EDUCATION

Educational institutions can create a studentcentric learning experience in a hybrid environment with BYOM.

Features and Benefits



Optional BYOM upgrade.



Supports HID USB AV devices such as cameras, microphone and speakers.



BYOM Driver available for Windows and Mac.



App based remote control or Virtual remote control through App/ Software.



No additional hardware is required or needs to be purchased.



Seamlessly connect to In-Room AV devices.

Two ways to Enable BYOM

Connect to the AV In-Room peripherals with NovoConnect software, Mobile App or the remote manager. No additional hardware is required.



NovoConnect
Software



Remote Manager

Supported Model

Download BYOM Driver:

<https://www.launchnovo.com/index/dsa>



NC-X500



NovoTouch



NC-X710




NovoDisplay



Digital Signage

Digital signage is an essential for businesses and industries that need to communicate effectively. Vivitek offers an affordable digital signage solution with NovoDS that is ideal for creating dynamic visual displays for corporate or public spaces.

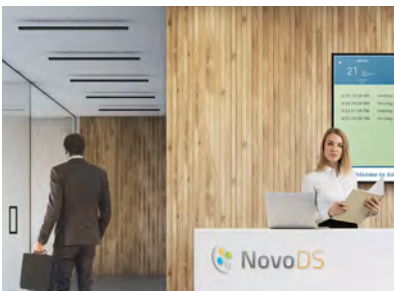

RECEPTION AREA

Employ digital signage for the reception area in a business office or hotel lobby to provide key information to your guests.



BUSINESS SETTING


Digital signage boards make it easy to communicate and deliver crucial information, such as way finding, meeting schedules, project status, or to promote a company's brand, mission and vision.



STUDENT OR TEACHER LOUNGE

Use the digital signage feature to communicate after-school programs, emergency updates, sporting events, or weekly lunch menus.

Features and Benefits

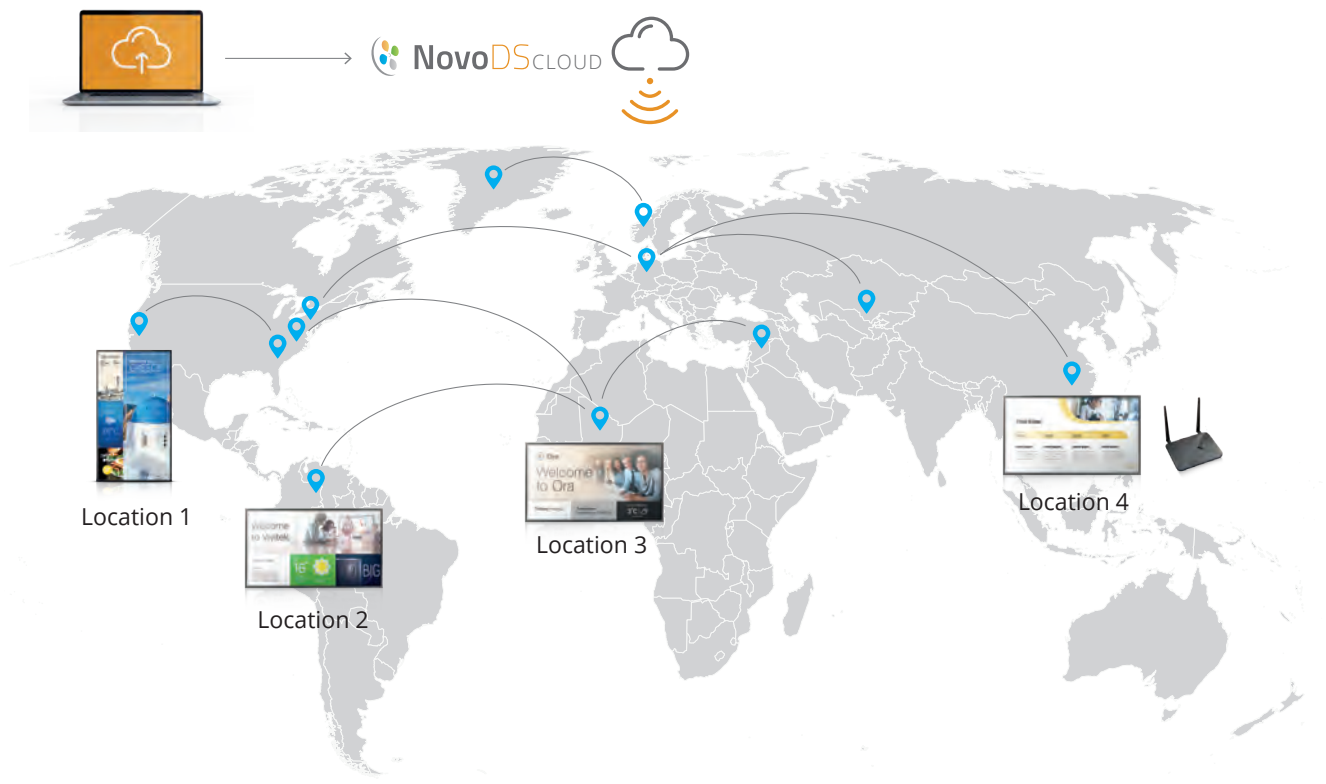

	NovoDS Cloud	NovoDS Studio
Flexible Layout	•	NA
Multi-Page Playlist		•
Playlist Preview on Device		•
Designer Templates	•	NA
Interactive Widgets	•	NA
Roles Based Access	•	NA
Over-the-air Software Upgrade		•
Software APIs for System Integration		•

Features and Benefits



Wireless content sharing from laptops, tablets or smartphones to the central screen.



Cloud and local content management software for user friendly content creation.



Easy to create signage content with predefined or flexible templates.



SSL security for NovoDS Cloud



Support for a wide range of dynamic content from text, audio, photos, video to webpages, calendar, Twitter, RSS, weather, IP streaming, YouTube etc.



Centralised device management to allow administrators to manage NovoDS devices groups.



Supports portrait and landscape mode.



Developers can use API to manage playlists, device settings and monitor device operations.

		
Model	NovoDS DS110	NovoDS DS310
Applications	Digital Signage	Digital Signage / Interactive Signage
Display Resolutions	3840 x 2160 (16:9, 4K-UltraHD)	3840 x 2160 (16:9, 4K-UltraHD at 60 fps)
Output Orientation	Portrait, Landscape	Portrait, Landscape
Input / Output Ports	USB 2.0 Type A x1, USB-C x1, microSD Card Slot, RJ45 x1, Power-Input (5V/2A) HDMI-Out v2.0 (HDCP v2.2 Compliant) x1, Audio-Out (3.5mm) x1	USB 2.0 Type A x1, USB 3.0 Type A x1, USB Type C x1, microSD Slot, RS-232 (A3.5mm), RJ45 (PoE) x1, Power Input (5V/2A), GPIO(3.3V x1, GND x1, GPIO x4), HDMI-In(4K@30fps)
Storage	Internal: 16 GB (12 GB available for users) External: microSD Card Slot (Up to 32GB), USB Flash Drive (Up to 32GB)	Internal: 32GB (eMMC Flash) External: microSD Card Slot (Up to 32GB), USB Type A/C Flash Drive (Up to 32GB)
Connectivity	Ethernet: 10/100Mbps	WiFi: 802.11 AC (2.4 GHz & 5 GHz) Ethernet: 10/100/1000 Mbps Bluetooth: 5.0
Power Supply	100 - 240V AC, 50/60 Hz,	100 - 240V AC, 50/60 Hz,
	DC output: 5V@2A	DC output: 5V@3A
Power Consumption	<10W	<15W
Weight	316g	490g
Dimensions (L x W x H) (in mm)	96 x 105 x 28	96 x 178 x 28

					
Size	43"	55"	65"	75"	85"
Applications	Signage / Education / Corporate / Hospitality				
Display Type/ Technology	Backlit D-LED (ADS Panel)				
Native Resolution	4K-UHD	4K-UHD	4K-UHD	4K-UHD	4K-UHD
Brightness (Typ.)	500 (cd/m2)	500 (cd/m2)	500 (cd/m2)	500 (cd/m2)	500 (cd/m2)
Estimated Lifetime (Typ.)	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Aspect Ratio	16:09	16:09	16:09	16:09	16:09
Installation Orientation	Landscape & Portrait				
Daily Operation (Hours/Days)	24/7	24/7	24/7	24/7	7-Dec
Haze Value	25%	25%	25%	25%	25%
Bezel Even	Yes	Yes	Yes	Yes	Yes
Built-in Software	Digital Signage (NovoDS) Wireless Collaboration (NovoConnect)				
Connectivity	Input: HDMI v2.0 (ARC, HDCP v2.2) x2 Output: HDMI Out-4K@ 60Hz (x1) , Audio-Out (3.5mm) (x1) S/PDIF Out x1 USB: USB 3.0 x1, USB 2.0 x1 Internet: LAN RJ45 (1Gbps) x1 UART: RS232 x1				
Wireless	Wi-Fi 802.11ac / Bluetooth 5.0 / IR Receiver				
OPS Interface	Standard 80pin Compliant				NA
Speaker	10W x2 (Stereo)				
OTA Upgrade	Yes	Yes	Yes	Yes	Yes
Device Management	PC Based / Cloud Based				
Warranty	3 Years	3 Years	3 Years	3 Years	3 Years



Vivitek EMEA
Zandsteen 15 | 2132 MZ Hoofddorp | The Netherlands
tel: +31 20 800 3960 | e-mail: info@vivitek.eu
www.vivitek.eu | www.deltadisplays.eu

© Copyright 2025 Vivitek. Vivitek is a registered trademark of Delta, Inc.
All specifications are subject to change at any time.